


Cre8 Tongue & Groove MDF Panels Specification

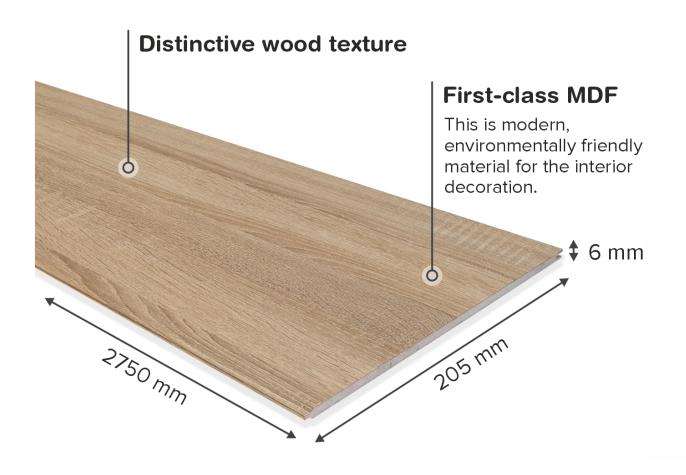


TECHNICAL PROPERTIES	
Per Package	7 Pcs
Size(mm)	2750 x 205 x 6
Color	Natural Oak
Installation	PU Adhesive or Panel Clips
Profile	-{
Substrate	MDF

KEY POINTS

- To be stored indoors (temperatures +5°C to 35°C)
- Use indoors with a relative humidity of no more than 70%
- Don't use near open fire
- Don't expose to water or direct sunlight
- Acclimatise product prior to installation for 24 hours
- Formaldehyde E1



Cre8 Tongue & Groove MDF Panels Specification

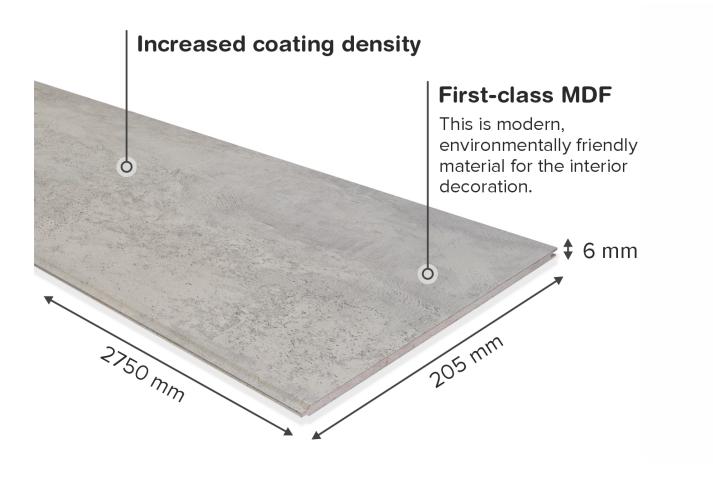

TECHNICAL PROPERTIES	
Per Package	7 Pcs
Size(mm)	2750 x 205 x 6
Color	Concrete Grey
Installation	PU Adhesive or Panel Clips
Profile	<
Substrate	MDF

KEY POINTS

- To be stored indoors (temperatures +5°C to 35°C)
- Use indoors with a relative humidity of no more than 70%
- Don't use near open fire
- Don't expose to water or direct sunlight
- Acclimatise product prior to installation for 24 hours
- Formaldehyde E1



Cre8 Tongue & Groove MDF Panels Specification




TECHNICAL PROPERTIES	
Per Package	7 Pcs
Size(mm)	2750 x 205 x 6
Color	Oak White
Installation	PU Adhesive or Panel Clips
Profile	₹
Substrate	MDF

KEY POINTS

- To be stored indoors (temperatures +5°C to 35°C)
- Use indoors with a relative humidity of no more than 70%
- Don't use near open fire
- Don't expose to water or direct sunlight
- Acclimatise product prior to installation for 24 hours
- Formaldehyde E1



Cre8 Tongue & Groove MDF Panels Specification

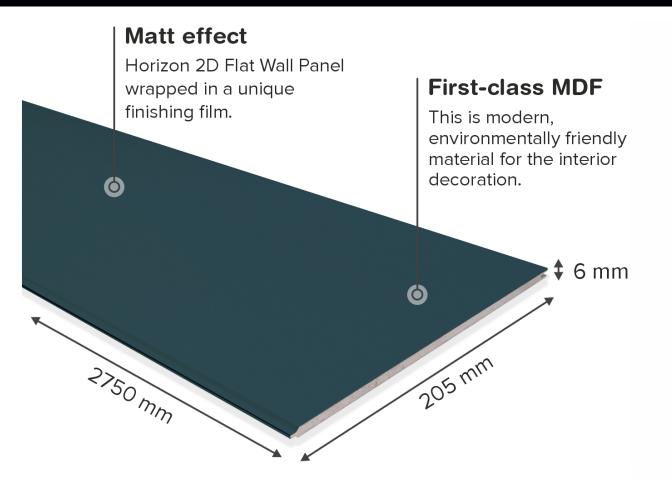

TECHNICAL PROPERTIES	
Per Package	7 Pcs
Size(mm)	2750 x 205 x 6
Color	Ocean Blue
Installation	PU Adhesive or Panel Clips
Profile	<
Substrate	MDF


KEY POINTS

- To be stored indoors (temperatures +5°C to 35°C)
- Use indoors with a relative humidity of no more than 70%
- Don't use near open fire
- Don't expose to water or direct sunlight
- Acclimatise product prior to installation for 24 hours

Formaldehyde - E1



Cre8 Tongue & Groove MDF Panels Specification

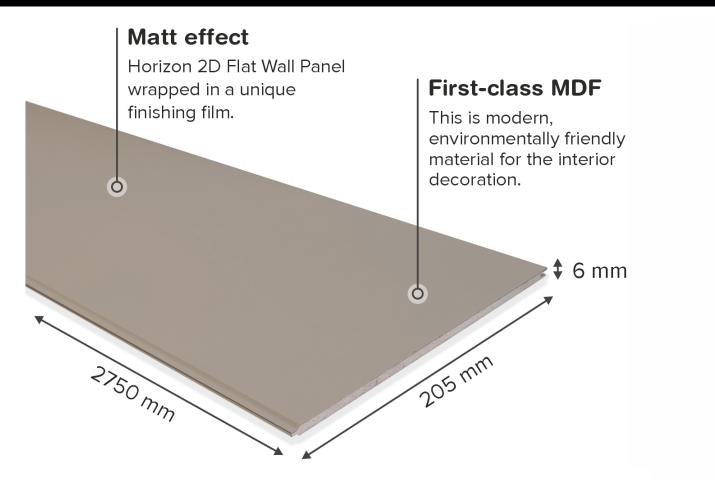

TECHNICAL PROPERTIES	
Per Package	7 Pcs
Size(mm)	2750 x 205 x 6
Color	Stone Grey
Installation	PU Adhesive or Panel Clips
Profile	<
Substrate	MDF

KEY POINTS

- To be stored indoors (temperatures +5°C to 35°C)
- Use indoors with a relative humidity of no more than 70%
- Don't use near open fire
- Don't expose to water or direct sunlight
- Acclimatise product prior to installation for 24 hours

Formaldehyde - E1